


Extrudes Easily from 0°F - 100°F

DRYWALL

Construction Adhesive

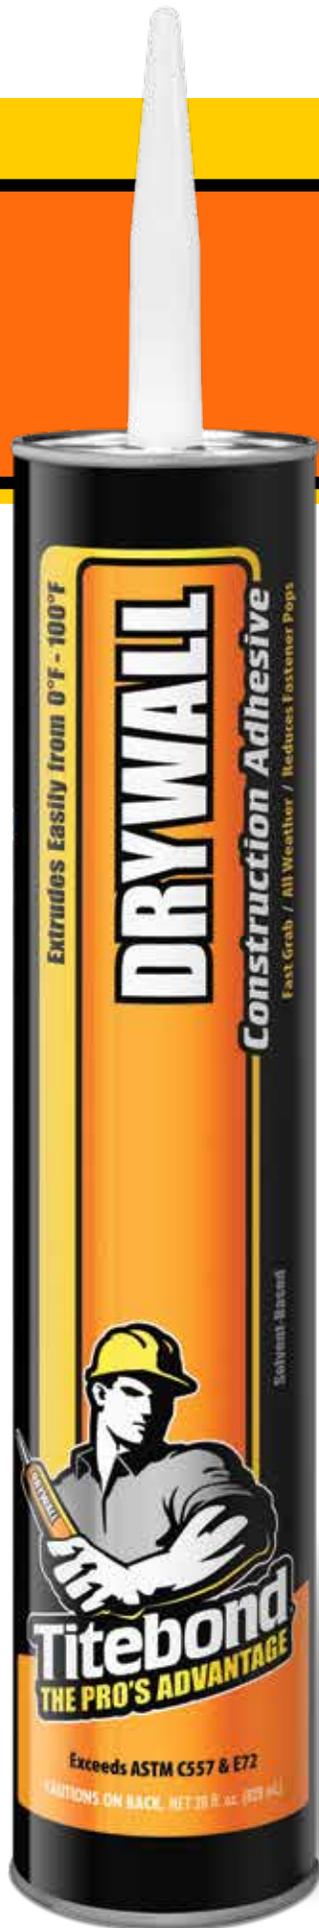

Titebond® Solvent-Based Drywall Construction Adhesive is specifically designed for installing drywall and paneling to most common building materials including wood and metal studs. It offers excellent adhesion, reduces nail pops and provides a “no sag” installation.

Solvent-Based

Strong initial tack allows panels to be positioned quickly without slipping

Will not become hard or brittle

Exposure to moisture or intermittent cold water has little effect on bond

Fills irregularities between materials to provide a more solid backup surface

Strong fast grab

All weather

Reduces nail pops

Recommended For


Installation of drywall and paneling to most common building materials.

Specifications & Certifications

Exceeds ASTM C557. Tested in accordance with ASTM E72 for racking and shearing.

Compatible Materials

Common building materials including wood, metal, gypsum wallboard, plywood, hardboard, tile board, plaster, wallpaper (non-vinyl) and most other porous materials.

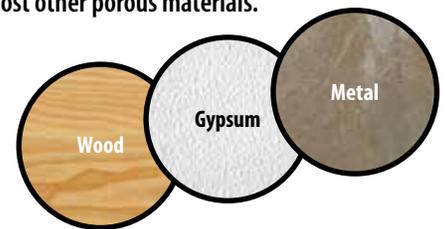

Titebond®
THE PRO'S ADVANTAGE

Ordering/Sku Information

Size	Part Number	UPC	Case UPC	Weight	Units Per Package	Packages Per Pallet
28 Oz. Cartridge	5352	037083053524	10037083053521	30.85 lbs.	12	44

Technical Information

- **Application Temperature:** 0°F to 100°F
- **Service Temperature:** 0°F to 120°F
- **Working Time:** Approximately 20 minutes for a 1/4" bead

Physical Properties

- **Type:** Synthetic elastomeric polymer
- **State:** Thixotropic medium-viscosity mastic
- **Color:** Brown
- **Solids:** 68%
- **Viscosity:** 150,000 cps
- **VOC:** 365 g/L
- **Weight/Gallon:** 11.8 lbs.
- **Flashpoint:** < 0°F
- **Freeze/Thaw Stability:** Will not freeze
- **Storage Life:** 18 months in tightly closed containers at 75°F
- **Odor:** Solvent (strong)

User Tips

Not designed for continuous submersion. Do not use on vinyl-coated drywall, polystyrene foam or rigid plastics. Do not adhere one non-porous material to another as this will slow or prevent drying.

Directions

PREP: Surfaces must be clean and free of any material that may prevent adequate adhesion.

APPLICATION: Cut tip on slant for 1/4" to 3/8" bead. Puncture inner seal and place in cartridge gun. Apply continuous bead of adhesive to studs or furring strips. Where two panels join, apply a zigzag bead so adhesive will contact both panels. **Adhere materials within 20 minutes.** Press surfaces firmly together for full contact with adhesive. **Note:** For drywall, use fasteners in accordance with local building standards. For paneling or other large applications, use finishing nails at top and bottom and brace overnight as needed. When applying adhesive overhead for ceiling applications, use 3/8" bead or less.

CLEANUP: Tools and adhesive may be cleaned with acetone or mineral spirits. Follow solvent vendor's precautions.

Coverage

Size	1/8" bead	1/4" bead	3/8" bead
28 Oz. Cartridge	355 ft.	86 ft.	39 ft.



Solvent-Based

Visit Titebond.com for the most up-to-date product information.

Franklin International

