

Titebond®

THE PRO'S ADVANTAGE

CAULKS & SEALANTS

Established as an innovative leader within the woodworking and construction markets, Titebond offers a comprehensive line of caulks and sealants that exceed industry performance specifications.



Titebond®

THE PRO'S ADVANTAGE



With a long-term commitment to the future growth of our customers, partners and worldwide markets, Franklin International is positioned to provide many application solutions. Through more than 90 years of innovative research and development, Franklin formulated the Titebond brand of products. Professionals demand performance and Titebond delivers the quality and consistency that ensures unbeatable adhesion in a wide variety of applications and weather conditions.

INNOVATION

Caulks & Sealants

Innovation

The **FIRST** comprehensive line of colored caulks.

The **FIRST** full color palette offering of advanced polymer technology sealants for vinyl siding, fiber cement siding, metal roofing and overall building material industries.

4

High Performance Sealants

WeatherMaster
Concrete Joint

Metal Roof
Gutter & Seam

Ultimate MP

12

Exterior Sealants

Roof Plus
Blacktop Repair

Roof Cement

Concrete Repair

14

Interior Sealants

Radon

Acoustical

16

Multi-Purpose Caulks & Sealants

100% Silicone
Pro-Grade

UA 920

Pro-Grade Plus

19

Specialty

TitePatch

20

Foam Sealants

X-TREME Foam Sealants

22

Merchandising

24

Specifications

26

SKU Information



With our quality sealants, it is important to follow **installation guidelines** to ensure the sealant performs as expected. Deviating from these guidelines will void any warranties we may provide.

Please visit titebond.com/sig to review these guidelines before you begin your project.

WEATHERMASTER™ *Sealant*



Titebond® WeatherMaster™ Sealant is a premium-grade, superior polymer formula that offers unbeatable adhesion to wood, vinyl siding, masonry, PVC, fiber-cement siding/trim and most common building materials. It can be extruded in low temperatures, remains permanently flexible with zero shrinkage, adheres well to damp surfaces and provides a weatherproof seal against the elements.

Ideal For

Sealing windows, doors, shutters, exterior trim, siding, gutters and vents.

Seals

Siding, windows, doors, PVC, glass, fiberglass, masonry, wood and most common building materials.

Ordering Information

9.5 oz. Cartridge with removable nozzle
 White
 Clear
 Translucent

ITEM #	UNITS/CASE	CASES/PALLET
44001	12	108
43991	12	108
44011	12	108

200+ Colors Available

Performance



APPLY DOWN TO 0°F



UV RESISTANT



PERMANENTLY FLEXIBLE



CRACK PROOF



ALCOHOL CLEANUP



ALL WEATHER



ADHERES TO WET SURFACES



PAINTABLE*



MILDEW/MOLD RESISTANT

Joint Movement

This sealant formula is capable of $\pm 50\%$ joint movement.

Applications

Application Temperature
Above 0°F (-18°C)

Tooling Time
For a 1/4" bead, approx 10-15 minutes, depending on temperature & humidity

Painting
Sealant is intended for exterior use. If used indoors, sealant may need to be painted. In most cases, painting may occur one hour after application with a high-quality acrylic, water-based (latex) paint that does not contain plasticizer*. It is recommended to paint over sealant with a shellac-based primer before painting. For other paint types, a compatibility test is recommended.

*Titebond WeatherMaster Translucent (44011) is a neutral cure silicone and NOT paintable.

Specifications


- ASTM C920 Type S Grade NS Class 50 Use T, NT, M, A & G
- Federal Specification TT-S-00230C Type II Class A (White, Colors and Crystal Clear)
- CAN/CGSB-19 13-M87 Classification MCG-2-25-A-N (White, Colors and Crystal Clear)
- USDA Compliant
- AAMA 802.3-16 Type II, AAMA 803.3-16, AAMA 808.3-16 & AAMA 714-19 (White and Colors)
- LEED v4.1 (White and Colors)

Color Matching Program

Titebond is one of the only sealant manufacturers to offer a unique color matching program. Our 200+ colors are specifically matched to today's most popular siding, window and door colors. If you cannot find the perfect match for your application, please contact us at 1.800.347.4583 and we will provide you with an exact match.



METAL ROOF *Sealant*

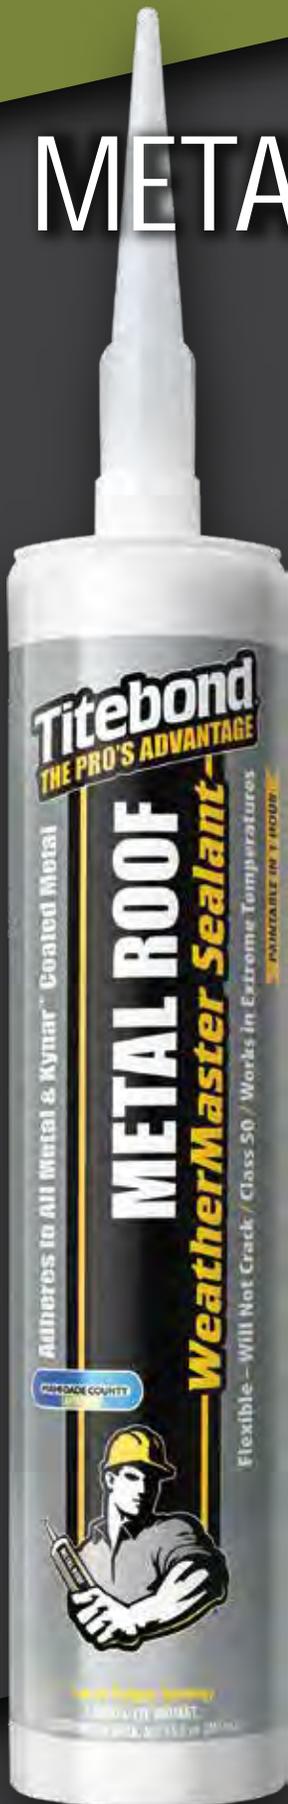

Titebond® WeatherMaster™ Metal Roof Sealant offers unbeatable adhesion to all metals including Kynar™ coated metals and most common building materials. It can be extruded in extreme temperatures and adheres well to wet and damp surfaces.

Ideal For

Sealing metal roofs, windows, doors, siding, gutters and vents.

Seals

Kynar™ coated metals, aluminum, galvanized steel, copper, PVC, wood, concrete, masonry, stucco, wall panels, vinyl, glass, plastic, siding, flashing, sheet metal and most common building materials.

Ordering Information

9.5 oz. Cartridge / White with removable nozzle

ITEM #	UNITS/CASE	CASES/PALLET
61001	12	108

100+ Colors Available



20 oz. Sausage Packs / White

63002	20	42
-------	----	----

11 Colors Available

Performance



ADHERES TO COATED METALS



CRACK PROOF



PERMANENTLY FLEXIBLE



ALCOHOL CLEANUP



ADHERES TO WET SURFACES



ALL WEATHER



APPLY DOWN TO 0°F



PAINTABLE*



MILDEW/MOLD RESISTANT



UV RESISTANT



Joint Movement

This sealant formula is capable of $\pm 50\%$ joint movement.

Applications**Application Temperature**

Above 0°F (-18°C)

Tooling Time

For a 1/4" bead, approx 10-15 minutes, depending on temperature & humidity

Painting

Sealant is intended for exterior use. If used indoors, sealant may need to be painted. In most cases, painting may occur one hour after application with a high-quality acrylic, water-based (latex) paint that does not contain plasticizer*. It is recommended to paint over sealant with a shellac-based primer before painting. For other paint types, a compatibility test is recommended.

*Titebond WeatherMaster Metal Roof Translucent (61111) is a neutral cure silicone and NOT paintable.

Specifications

ASTM C920 Type S Grade NS Class 50 Use T, NT, M, A & G

Federal Specification TT-S-00230C Type II Class A (White, Colors and Crystal Clear)

CAN/CGSB-19 13-M87 Classification MCG-2-25-A-N (White, Colors and Crystal Clear)

USDA Compliant

Color Matching Program


Titebond is one of the only sealant manufacturers to offer a unique color matching program. Our 100+ colors are specifically matched to today's most popular metal colors. If you cannot find the perfect match for your application, please contact us at 1.800.347.4583 and we will provide you with an exact match.

MIAMI-DADE COUNTY
APPROVED

Approved for use on buildings in both Miami-Dade County and throughout the country (White and Colors).

Product passed stringent third-party testing to meet requirements of use in high-wind areas.

ULTIMATE MP *Sealant*

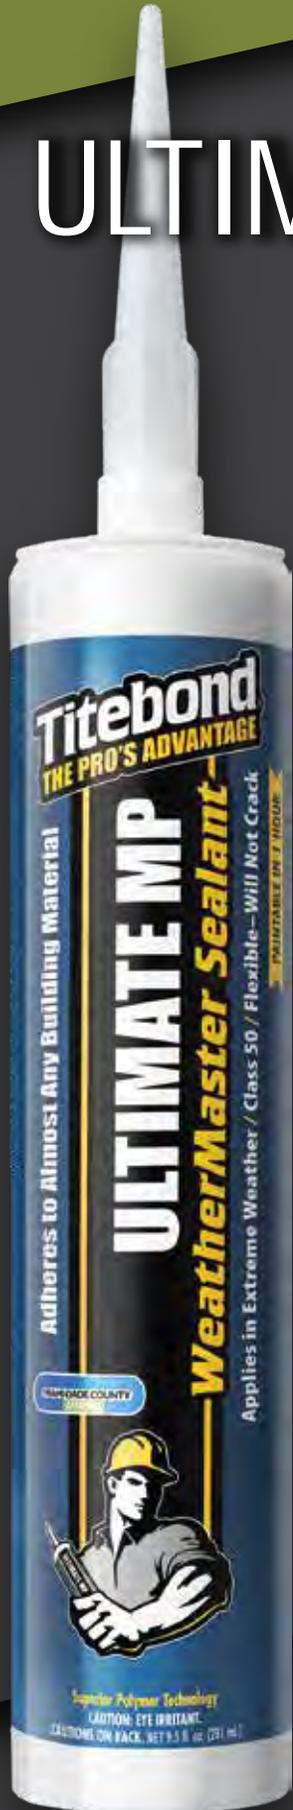

Titebond® WeatherMaster™ Ultimate MP Sealant is a premium-grade, multi-purpose exterior sealant that offers unbeatable adhesion to most common building materials. It is specifically formulated to outperform all other sealant technologies, including solvents, silicones, tripolymers and urethanes.

Ideal For

Exterior applications: windows, doors, shutters, exterior trim, metal/vinyl siding, gutters, vents, RVs, metal roofs, tractor trailers and buses.

Seals

PVC, wood, concrete, masonry, stucco, wall panels, vinyl, glass, fiberglass, plastic, siding, flashing, sheet metal, Kynar™ coated metals, aluminum, galvanized steel, copper and most common building materials.

Ordering Information

9.5 oz. Cartridge / White with removable nozzle

ITEM #	UNITS/CASE	CASES/PALLET
71001	12	108

15+ Colors Available



20 oz. Sausage Packs / White

ITEM #	UNITS/CASE	CASES/PALLET
71002	20	42

11 Colors Available

Performance

- 
ADHERES TO COATED METALS
- 
CRACK PROOF
- 
PERMANENTLY FLEXIBLE
- 
ALCOHOL CLEANUP
- 
ADHERES TO WET SURFACES
- 
ALL WEATHER
- 
APPLY DOWN TO 0°F
- 
PAINTABLE*
- 
MILDEW/MOLD RESISTANT
- 
UV RESISTANT





ULTIMATE PERFORMANCE

HIGH PERFORMANCE SEALANTS

Joint Movement

This sealant formula is capable of $\pm 50\%$ joint movement.

Applications

Application Temperature

Above 0°F (-18°C)

Tooling Time

For a 1/4" bead, approx 10-15 minutes, depending on temperature & humidity

Painting

Sealant is intended for exterior use. If used indoors, sealant may need to be painted. In most cases, painting may occur one hour after application with a high-quality acrylic, water-based (latex) paint that does not contain plasticizer*. It is recommended to paint over sealant with a shellac-based primer before painting. For other paint types, a compatibility test is recommended.

*Titebond WeatherMaster Ultimate MP Translucent (71111) is a neutral cure silicone and NOT paintable.

Specifications

ASTM C920 Type S Grade NS Class 50 Use T, NT, M, A & G, Federal Specification TT-S-00230C Type II Class A (White, Colors and Crystal Clear), CAN/CGSB-19 13-M87 Classification MCG-2-25-A-N (White, Colors and Crystal Clear), USDA Compliant, AAMA 803.3-16, AAMA 808.3-16 & AAMA 714-19 (White and Colors)


MIAMI-DADE COUNTY
APPROVED

Approved for use on buildings in both Miami-Dade County and throughout the country (White and Colors).

Product passed stringent third-party testing to meet requirements of use in high-wind areas.



CONCRETE JOINT *Sealant*

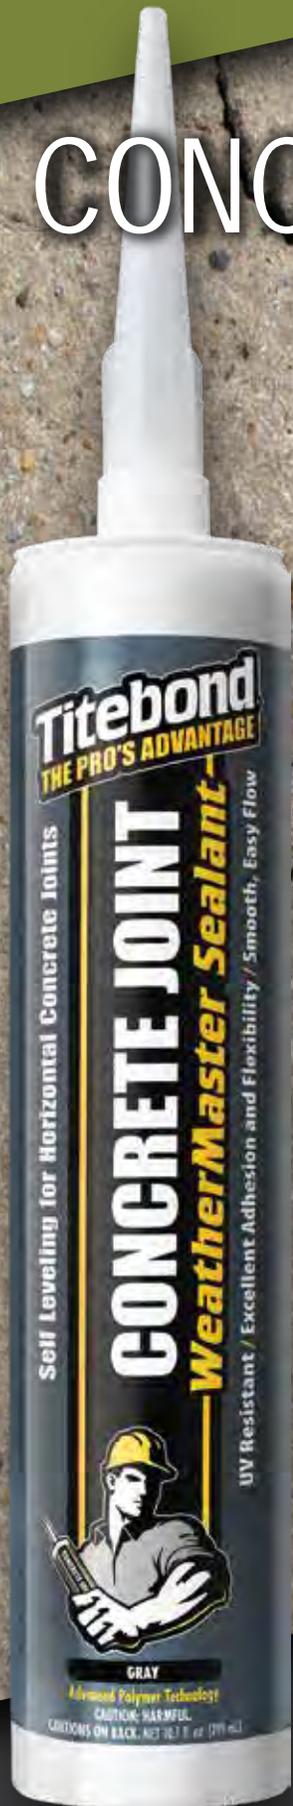

Titebond® WeatherMaster™ Concrete Joint Sealant is a one-component, self-leveling, advanced polymer sealant that is designed to flow easily and smoothly into concrete cracks and joints, providing a permanent, durable seal.

Ideal For

Expansion joints, repairing cracks in concrete decks and floors, patios, sidewalks, driveways, basements and garages.

Seals

Concrete, galvanized steel, aluminum, wood and most common building materials.

Ordering Information

10.1 oz. Cartridge
Gray with removable nozzle

ITEM #	UNITS/CASE	CASES/PALLET
3191	12	108

Joint Movement

This sealant formula is capable of ±25% joint movement.

Applications

Application Temperature
Above 40°F (4.4°C)

Tooling Time

For a 1/4" bead, approx 10-15 minutes, depending on temperature & humidity

Specifications

ASTM C920 Type S Grade P Class 25 Use M (when primed) and T
Federal Specification TT-S-00230C Type I Class A
CAN/CGSB-19 13-M87 Classification C-1-40-B-N and C-1-25-B-N

Performance



UV RESISTANT



PERMANENTLY FLEXIBLE



PAINTABLE



CRACK PROOF



ALCOHOL CLEANUP



GUTTER & SEAM *Sealant*

Titebond® WeatherMaster™ Gutter & Seam Sealant is a long-lasting, superior polymer sealant that maintains resiliency and flexibility. It provides a highly weather-resistant seal against water, wind, dust and dirt.

Ideal For

Sealing aluminum, galvanized and vinyl clad gutters and downspouts.

Seals

Aluminum, galvanized steel, PVC, metal, copper, masonry, wood and most common building materials.

Ordering Information

9.5 oz. Cartridge with removable nozzle
 White
 Aluminum Gray

ITEM #	UNITS/CASE	CASES/PALLET
7321	12	108
7331	12	108

Joint Movement

This sealant formula is capable of ±50% joint movement.

Applications

Application Temperature
 Above 0°F (-18°C)

Tooling Time
 For a 1/4" bead, approx 10-15 minutes, depending on temperature & humidity

Specifications

ASTM C920 Type S Grade NS Class 50 Use T, NT, M, A & G
 Federal Specification TT-S-00230C Type II Class A
 CAN/CGSB-19 13-M87 Classification MCG-2-25-A-N
 USDA Compliant

Performance



APPLY DOWN TO 0°F



UV RESISTANT



PERMANENTLY FLEXIBLE



CRACK PROOF



ALCOHOL CLEANUP



ALL WEATHER




ADHERES TO WET SURFACES



PAINTABLE



MILDEW/MOLD RESISTANT

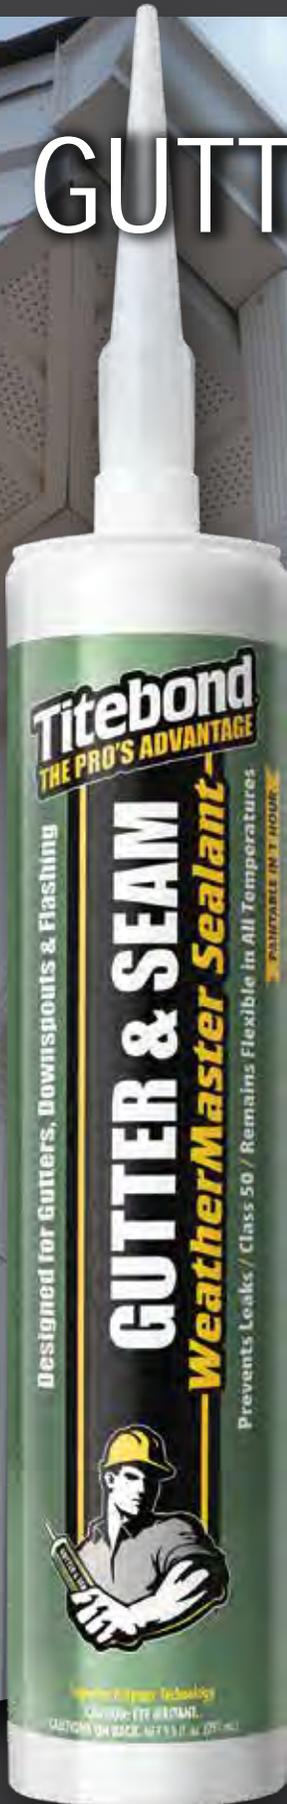

ROOF PLUS & ROOF CEMENT

Sealants

Titebond® Roof Plus Sealant is a water-resistant, solvent-based, elastomeric rubber sealant designed for roofing applications such as asphalt shingles, metal trim, solar roof systems, architectural metals, painted metals, aluminum and general roofing applications. It is resistant to dust, dirt and stains and is paintable. Sealant can be applied to itself (resealable).

Ideal For

Sealing metal trim, solar roof systems, architectural metals and general roofing applications.

Seals

Metal, aluminum, asphalt shingles, masonry, wood and most common building materials.

Ordering Information

10.1 oz. Cartridge
Clear

ITEM #	UNITS/CASE	CASES/PALLET
3241	12	108

Specifications

ASTM C920 Type S Grade NS Class 12.5 Use T, NT, M, A and O
Federal Specification TT-S-00230C Type II Class B

Performance



UV RESISTANT



PAINTABLE



SOLVENT CLEANUP

Titebond® Roof Cement Sealant is an all-weather, asphalt based patching compound specifically designed and formulated to repair cracks, seams, gaps and holes in roofing materials. It is ideal for repair and new construction roofing applications.

Ideal For

Sealing around skylights, vents, chimneys, valleys and exhaust pipes.

Seals

Metal, aluminum, asphalt, shingles, masonry, wood and most common building materials.

Ordering Information

10.3 oz. Cartridge
Black

ITEM #	UNITS/CASE	CASES/PALLET
3211	12	108

Specifications

Federal Specification SS-C-153C Type I, ASTM D6511,
SCAQMD Rule #1168, ASTM D4586

Performance



ALL WEATHER



ADHERES TO WET SURFACES



CRACK PROOF



PAINTABLE



SOLVENT CLEANUP

CONCRETE & BLACKTOP REPAIR *Sealants*



Titebond® Concrete Repair Sealant is a flexible, acrylic latex formula specifically designed for repairing and sealing cracks in steps, patios, driveways, sidewalks and mortar joints. Its excellent adhesion and flexibility will not peel, chip, crack or pull away from repaired areas. It provides an air-tight, weather-resistant seal that helps prevent water and ice damage.

Ideal For

Sealing cracks in steps, patios, driveways, sidewalks and mortar joints.

Seals

Concrete, stucco, metal, masonry, wood and most common building materials.

Ordering Information

10.1 oz. Cartridge
Gray

ITEM #	UNITS/CASE	CASES/PALLET
3171	12	108

Specifications

ASTM C834 Type OP Grade -18°C

Performance



CRACK PROOF



UV RESISTANT



PAINTABLE



WATER CLEANUP

Titebond® Blacktop Repair Sealant is a durable, acrylic latex formula specifically designed for repairing and sealing cracks in all asphalt surfaces. It dries quickly with a textured black color that blends well with surrounding surfaces. It will not peel, chip, crack or pull away from repaired areas due to temperature changes, UV light or severe weather changes. It helps prevent damage due to water and ice.

Ideal For

Sealing driveways, playgrounds, parking lots and pavement.

Seals

Asphalt, metal, masonry, wood and most common building materials.

Ordering Information

10.1 oz. Cartridge
Black

ITEM #	UNITS/CASE	CASES/PALLET
3181	12	108

Specifications

ASTM C834 Type OP Grade -18°C

Performance



CRACK PROOF



UV RESISTANT




PAINTABLE



WATER CLEANUP

RADON *Sealant*

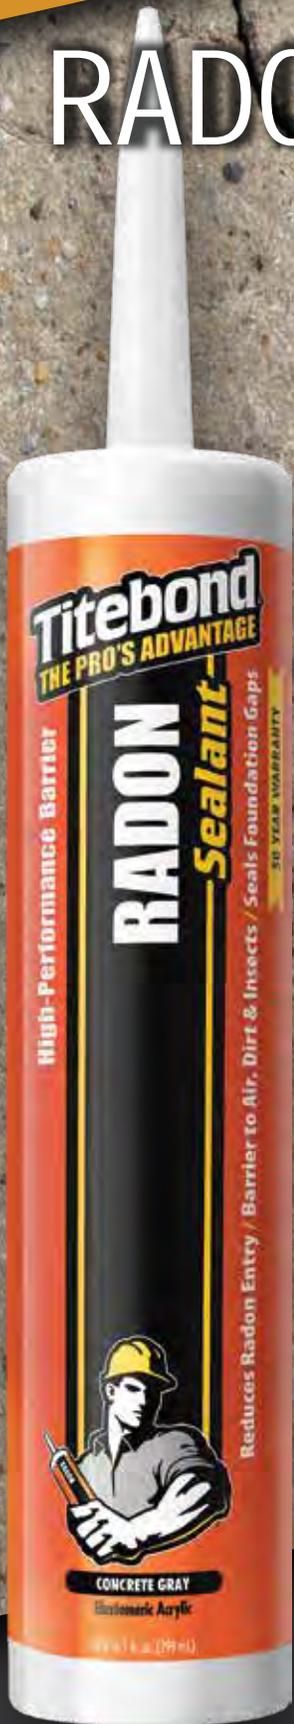

Titebond Radon Sealant is a non-chemically curing sealant combining flexibility and durability to help prevent radon entry. This permanent sealant allows $\pm 25\%$ joint movement, is easy to tool, and is UV, mold and mildew resistant. Use on foundation cracks, joints and penetrations, around pipes, foundation coatings normally used for damp proofing and membranes surrounding the foundation. Note: According to the EPA, sealants can help limit the entry of radon through the foundation. It is also recommended that a professionally installed radon mitigation or fan-based system be used in conjunction with this sealant.

Ideal For

Reducing the entry of radon through the foundation.

Seals

Concrete, galvanized steel, wood and most common building materials.

Ordering Information

10.1 oz. Cartridge
Concrete Gray

ITEM #	UNITS/CASE	CASES/PALLET
3251	12	108

Specifications

ASTM C920 Grade NS Class 25, ASTM C834 Type OP Grade -18°C
Federal Specification TTS-00230C Type II Class A

Performance



PERMANENTLY FLEXIBLE



WATER CLEANUP



PAINTABLE



TOOLS EASILY



ACOUSTICAL SMOKE & SOUND *Sealant*

Titebond® Acoustical Smoke & Sound Sealant is a professional-quality sealant designed to improve STC (Sound Transmission Class) ratings in wall and floor systems. It tools easily, is paintable, mold and mildew resistant, remains flexible and will not become hard or brittle with age. This VOC-compliant formula is plasticizer-free and non-flammable.

Ideal For

Sealing air gaps between floor/plate and around partition panels, repairing cracks, eliminating rattles in drywall/plaster and bonding drywall panels together.

Seals

Drywall, concrete, wood, metal, masonry, brick, stone, ceramic tile, marble, aluminum, piping including PVC and CPVC and most common building materials.

Ordering Information

28 oz. Cartridge
 White
 5 Gallon Pail
 White

ITEM #	UNITS/CASE	CASES/PALLET
2892	12	44
2897	1	24

Specifications

ASTM C834 Type OP Grade -18°C
 ASTM C920 Type S Grade NS Class 25 M, G and A
 CA 01350
 LEED v4.1
 UL tested and classified
 Tested in accordance with ASTM E84
 Appropriate for application and use in accordance with ASTM C919 and ASTM E90
 Meets NFPA Class A Fire Rating (0 smoke; 0 flame spread)
 Passes ASTM C557

Performance



PERMANENTLY FLEXIBLE




WATER CLEANUP



PAINTABLE



TOOLS EASILY

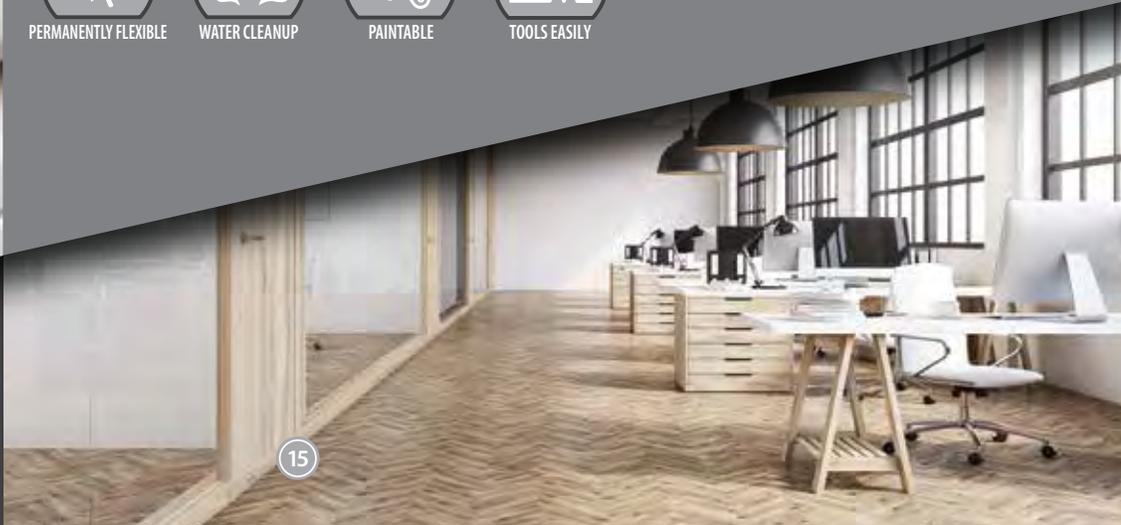

100% SILICONE *Sealant*



Titebond® 100% Silicone Sealant is a non-staining, versatile, acetoxy-cure formula designed for both interior and exterior applications. This strong, permanently flexible sealant will not shrink or discolor over time and provides excellent weather-resistance.

Ideal For

General construction, remodeling, repair projects and kitchen & bath applications.

Seals

Vinyl, aluminum, glass, marble, granite, painted surfaces and most common building materials.

Ordering Information

10.1 oz. Cartridge
White
Clear

ITEM #	UNITS/CASE	CASES/PALLET
2601	12	108
2611	12	108

Specifications

ASTM C920 Class 25, Federal Specification TT-S-00230C and TT-S-001543A, FDA regulation 21-CFR-177.2600 when fully cured and NSF 51 Certified for direct food contact

Performance



UV RESISTANT



SOLVENT CLEANUP



PERMANENTLY FLEXIBLE



CRACK PROOF



MILDEW/MOLD RESISTANT



UA 920 *Sealant*

Titebond® UA 920 Sealant is a high performance, elastomeric, urethane acrylic formula with superior adhesion and increased flexibility for durable, crackproof seals. It eliminates shiners, reduces dirt pickup and has great UV resistance, making it ideal for interior and exterior applications. The professional formula has superior handling and tooling properties, paintable in one hour and cleans easily with water.

Ideal For

Interior and exterior projects such as windows, doors, siding, trim, soffits and crown molding.

Seals

Wood, masonry, fiber cement, metal, vinyl siding, concrete and most common building materials.

Ordering Information

10.1 oz. Cartridge
White

ITEM #	UNITS/CASE	CASES/PALLET
87001	12	108

4 Colors Available

Specifications

ASTM C920 Class 35, ASTM C834 Type OP Grade -18°C, Federal Specification TT-S-00230C Type S Class A and AAMA 808.3

Performance



UV RESISTANT



WATER CLEANUP



PAINTABLE



CRACK PROOF



TOOLS EASILY



PRO-GRADE PLUS & PRO-GRADE *Caulks*

Titebond® Pro-Grade Plus Caulk is a multi-purpose, siliconized acrylic latex caulk for interior and exterior use. This easy-to-use formula dries quickly and cleans up with water. It offers great weather-resistance, tools easily and is paintable.

Ideal For

Sealing joints, repairing cracks and back-filling gaps for interior and exterior applications.

Seals

Wood, metal, glass, tile, drywall, plaster, concrete and most common building materials.

Ordering Information

10.1 oz. Cartridge
White
Clear
5 Gallon Pail
White

ITEM #	UNITS/CASE	CASES/PALLET
8401	12	108
8431	12	108
8407	1	24

9 Colors Available

Specifications

ASTM C834 Type OP Grade -0°C
ASTM C920 Type S Grade NS Class 25
ASTM C834 Type C Grade NF (CLEAR)

Performance



WATER CLEANUP



PAINTABLE



TOOLS EASILY

Titebond® Pro-Grade Caulk is a multi-purpose, acrylic latex caulk for interior use. Easy to use, dries quickly, cleans up with water and easily painted with a water-based paint and once cured, its seal is water resistant. It offers unbeatable adhesion to most common building materials.

Ideal For

Sealing joints, repairing cracks and filling gaps for interior applications and pre-paint preparation.

Seals

Wood, metal, glass, masonry, aluminum, brick and most common building materials.

Ordering Information

10.1 oz. Cartridge
White
5 Gallon Pail
White

ITEM #	UNITS/CASE	CASES/PALLET
7401	12	108
7407	1	24

Specifications

ASTM C834 Type OP Grade 0°C

Performance



WATER CLEANUP



PAINTABLE



TOOLS EASILY

TITEPATCH *Elastomeric Patching Compounds*

TitePatch™ Elastomeric Patching Compounds are designed for interior and exterior use to repair, seal and fill non-structural cracks in concrete, masonry and more. TitePatch has excellent adhesion, flexibility and is paintable in 60 minutes to permanently repair cracks.

Ideal For

Repair, seal and fill non-structural cracks in concrete, masonry, wood and more.

Seals

Concrete, masonry, stucco, wood, brick, aluminum and more.

Ordering Information

	ITEM #	UNITS/CASE	CASES/PALLET
1 Gallon Pail			
Smooth Knife	5356	4	30
Textured Brush	5366	4	30
Textured Knife	5376	4	30
Smooth Brush	5386	4	30
1 Quart Pail			
Smooth Knife	5355	6	90
Textured Brush	5365	6	90
Textured Knife	5375	6	90
Smooth Brush	5385	6	90

Performance



WATER CLEANUP



PAINTABLE



KNIFE GRADES



BRUSH GRADES



X-TREME WINDOW & DOOR **Foam**



Titebond® WeatherMaster™ X-TREME Window & Door low pressure, one-component polyurethane foam sealant is a high yield, closed cell, low pressure build window and door foam sealant. It complies with AAMA 812 and will not bow or distort windows or doors. X-TREME Window & Door is designed to resist moisture and mold problems.

Ideal For

Sealing windows and doors, and preventing moisture and mildew problems.

Ordering Information

12 oz. Can
24 oz. Can

ITEM #	UNITS/CASE	CASES/PALLET
8531	12	75
8532	12	48

Specifications

ASTM C518, ASTM D1621, ASTM D1622, ASTM D2126 AND D2856
AAMA 812, ASTM E283 AND GREENGUARD UL AND UL

X-TREME MULTI-PURPOSE **Foam**



Titebond® WeatherMaster™ X-TREME Multi-Purpose foam is a triple expansion, low pressure, one-component polyurethane foam sealant. It is moisture-cured and designed to seal and fill small cracks and voids. This product creates a tight barrier against noise, moisture and infiltration – even in X-TREME temperatures.

Ideal For

Sealing insulation board joints, electrical outlets, base plates, can lights and exterior gaps.

Ordering Information

12 oz. Can
24 oz. Can

ITEM #	UNITS/CASE	CASES/PALLET
8521	12	75
8522	12	48

Specifications

ASTM 1623, ASTM C518, ASTM D1621, ASTM D1622, ASTM D2126 AND ASTM D6226
GREENGUARD UL AND UL

X-TREME FIREBLOCK Foam



Titebond® WeatherMaster™ X-TREME Fireblock low pressure one-component polyurethane foam sealant is a moisture cured foam designed to seal, fill, bond and stop air infiltration in areas where a fireblock product is required. It has a recognizable orange color allowing inspectors to easily identify the use of an approved fireblock product for Type V residential construction. Due to its expansion characteristics, it is more effective than many traditional fireblocking materials for the blocking of flames and smoke in concealed penetrations, preventing flame spread from room to room and floor to floor.

Ideal For

Sealing, filling, bonding and stopping air infiltration where a fireblock product is required.

Ordering Information

12 oz. Can / Orange
24 oz. Can / Orange

ITEM #	UNITS/CASE	CASES/PALLET
8541	12	75
8542	12	48

Specifications

ASTM 1623, ASTM C518, ASTM D1621, ASTM D1622 AND ASTM D2126
ASTM E814, ASTM E2178, GREENGUARD UL AND UL

X-TREME ACCESSORIES



Titebond® WeatherMaster™ X-TREME Dispensing Unit designed for frequent use by the professional contractor. Adjustable bead control with X-TREME foam sealants.

Titebond WeatherMaster X-TREME Multi-Purpose Cleaner is an acetone cleaner designed to clean up and dissolve uncured WeatherMaster X-TREME foam sealants.

Ordering Information

Dispenser Gun / 7" Barrel (18 cm)
Multi-Purpose Cleaner

ITEM #	UNITS/CASE	CASES/PALLET
17862	2	120
8551	12	75





Titebond offers a variety of merchandising materials to assist in the marketing, display and promotion of our caulks and sealants. These merchandisers are available to all customers and a Titebond representative can order and assist in set-up. All items can be combined to best fit the needs of individual stores and situations.

To order, please contact your Titebond representative.

All merchandisers are ordered on a first come, first serve basis while supplies last. Products sold separately unless otherwise noted. Additional lead time should be expected if items are on back order.



Vinyl Banner 60" w x 24" h

Display in-store to showcase the Titebond family of sealants.



Demo Bricks

Ideal for training or P.O.P. placement

Available for these products:

WeatherMaster, Metal Roof and Ultimate MP

Cartridge Rolling Dolly Display

27" w x 62" h x 14" d

Durable, versatile display for any cartridge item
8 baskets per dolly – Holds 24 cartridges per basket
Shelf cards slide easily into front channel

ITEM #	DESCRIPTION	CASE PACK
17980	Cartridge Rolling Dolly Display with Titebond Header	1



Counter Mats 18" w x 12" h

Display the Titebond sealant family on counter space.



Color Boards

- WeatherMaster Color Board**
Showcases ACTUAL product/color
Convenient size fits on top of dolly rack
- Metal Roof Color Board**
Showcases ACTUAL product/color
Convenient size fits on top of dolly rack
- Ultimate MP Color Card**
Showcases ACTUAL product/color
- Pro-Grade Plus Color Card**
Showcases ACTUAL product/color

SUPPORT

Merchandising



Chain Signs 5" w x 7" h
 Ideal for P.O.P. placement
 Available for these products:
 Ultimate MP, Metal Roof, Gutter & Seam,
 Radon and Concrete Joint



Sales Presentation Kits
 Ideal for training and potential customers
 Kits include 2 tubes of product, demo brick, sales sheets
 and other corresponding product literature.
 Available for these products:
 WeatherMaster, Metal Roof and Ultimate MP



Shelf Cards
 28 oz. Shelf Cards 17.75" w x 3" h
 Can be inserted into 28 oz. Cartridge Bin Baskets.
 10 oz. Shelf Cards 12" w x 3" h
 Can be inserted into 10 oz. Vertical Pusher Racks and 10 oz. Cartridge Bin Baskets.



Horizontal Cartridge Bin Baskets
 Perfect for "on-shelf" merchandising, shelf cards slide easily into front channel.
 Durable metal construction.
 10 oz. Long Nozzle Cartridge Bin Basket 13" w x 7.5" h x 14.5" d
 Fits long nozzle, reactive sealants
 Holds 24 cartridges



Vertical Pusher Rack 12" w x 7" h x 14" d
 Four row Pusher Rack holds 30 cartridges

ITEM #	DESCRIPTION	CASE PACK
17977	10 oz. Long Nozzle Bin Basket	2
17954	10 oz. Double Long Nozzle Bin Basket	1
17986	10 oz. Vertical Pusher Rack	2

Titebond caulks and sealants must pass stringent testing set forth by standardized testing methods. These specifications ensure that a product is suitable for a specific application and that it will perform as expected. Below is a reference guide to assist in your product selection.

Visit titebond.com for the most up-to-date information.

	AAMA 803.3	AAMA 808.3	ASTM C834	ASTM C919	ASTM C920	ASTM D6511	ASTM E84	ASTM E90	FDA 21-CFR-177.2600	LEED v4.1	MIAMI-DADE COUNTY APPROVED	NFPA CLASS A FIRE RATING	NSF 51 CERTIFIED	SCAQMD RULE #1168
WEATHERMASTER		●			●					●				
METAL ROOF		●			●						●			
ULTIMATE MP		●			●						●			
CONCRETE JOINT					●									
GUTTER & SEAM					●									
CONCRETE REPAIR			●											
BLACKTOP REPAIR			●											
ROOF PLUS					●									
ROOF CEMENT						●								●
RADON			●		●									
ACOUSTICAL			●	●	●		●	●		●		●		
100% SILICONE					●				●				●	
UA 920		●	●		●									
PRO-GRADE			●											
PRO-GRADE PLUS			●		●									
TITEPATCH														

TECHNOLOGY

Specifications

SS-C-153C	FEDERAL SPECIFICATIONS		UL TESTED & CLASSIFIED	USDA COMPLIANT	CA 01350	CAN/CGSB-19.13-M87	PAINTABLE	STANDARD COLORS	VOC CONTENT	CLEANUP
	TT-S-001543A	TT-S-00230C								
		●		●		●	1 HOUR	200+	<2%	ACETONE OR ISOPROPYL ALCOHOL
		●		●		●	1 HOUR	100+	<2%	ACETONE OR ISOPROPYL ALCOHOL
		●		●		●	1 HOUR	15+	<2%	ACETONE OR ISOPROPYL ALCOHOL
		●				●	1 HOUR	1	<2%	ACETONE OR ISOPROPYL ALCOHOL
		●		●		●	1 HOUR	2	<2%	ACETONE OR ISOPROPYL ALCOHOL
							2-4 HOURS	1	<1.5%	WATER
							2-4 HOURS	1	<1.5%	WATER
		●					2 HOURS	1	32%	XYLENE
●							2 HOURS	1	27%	XYLENE
		●					2-4 HOURS	1	<1.5%	WATER
			●		●		2-4 HOURS	1	<2.5%	WATER
	●	●					NO	2	3%	MINERAL SPIRITS
		●					1-2 HOURS	4	<1.5%	WATER
							2-4 HOURS	1	<1.5%	WATER
							2-4 HOURS	9	<1.5%	WATER
							1 HOUR	NA	<50 g/L	WATER

		PRODUCT NUMBER
HIGH PERFORMANCE	WEATHERMASTER 9.5 OZ. – WHITE	44001
	WEATHERMASTER METAL ROOF 9.5 OZ. – WHITE	61001
	WEATHERMASTER METAL ROOF 20 OZ. SAUSAGE – WHITE	63002
	WEATHERMASTER ULTIMATE MP 9.5 OZ. – WHITE	71001
	WEATHERMASTER ULTIMATE MP 20 OZ. SAUSAGE – WHITE	71002
	WEATHERMASTER CONCRETE JOINT 10.1 OZ. – GRAY	3191
	WEATHERMASTER GUTTER & SEAM 9.5 OZ. – WHITE	7321
EXTERIOR	CONCRETE REPAIR 10.1 OZ.	3171
	BLACKTOP REPAIR 10.1 OZ.	3181
	ROOF PLUS 10.1 OZ.	3241
	ROOF CEMENT 10.3 OZ.	3211
INTERIOR	RADON 10.1 OZ.	3251
	ACOUSTICAL 28 OZ.	2892
MULTI-PURPOSE	100% SILICONE 10.1 OZ. – WHITE	2601
	UA 920 10.1 OZ. – WHITE	87001
	PRO-GRADE 10.1 OZ.	7401
	PRO-GRADE PLUS 10.1 OZ. – WHITE	8401
SPECIALTY	TITEPATCH SMOOTH KNIFE 1 QUART	5355
	TITEPATCH SMOOTH KNIFE 1 GALLON	5356
	TITEPATCH TEXTURED BRUSH 1 QUART	5365
	TITEPATCH TEXTURED BRUSH 1 GALLON	5366
	TITEPATCH TEXTURED KNIFE 1 QUART	5375
	TITEPATCH TEXTURED KNIFE 1 GALLON	5376
	TITEPATCH SMOOTH BRUSH 1 QUART	5385
	TITEPATCH SMOOTH BRUSH 1 GALLON	5386
FOAM	X-TREME MULTI-PURPOSE STRAW FOAM AEROSOL 12 OZ.	8521
	X-TREME MULTI-PURPOSE GUN FOAM AEROSOL 24 OZ.	8522
	X-TREME WINDOW & DOOR STRAW FOAM AEROSOL 12 OZ.	8531
	X-TREME WINDOW & DOOR GUN FOAM AEROSOL 24 OZ.	8532
	X-TREME FIREBLOCK STRAW FOAM AEROSOL 12 OZ.	8541
	X-TREME FIREBLOCK GUN FOAM AEROSOL 24 OZ.	8542
	X-TREME MULTI-PURPOSE CLEANER AEROSOL 12 OZ.	8551
	X-TREME FOAM DISPENSER GUN	17862

PRODUCTS

SKU Information

PRODUCT UPC	CASE UPC	CASE QUANTITY	PRODUCT WEIGHT (LBS.)	CASE LENGTH (INCHES)	CASE WIDTH (INCHES)	CASE HEIGHT (INCHES)	SHELF LIFE (MONTHS)	PALLET QUANTITY	PALLET WEIGHT (LBS.)
0 37083 44001 0	100 37083 44001 7	12	12.41	6.25	8.13	12.25	24	108	1340.28
0 37083 61001 7	100 37083 61001 4	12	12.41	6.25	8.13	12.25	24	108	1340.28
0 37083 63002 2	100 37083 63002 9	20	38.51	8.00	14.00	10.50	48	42	1617.42
0 37083 71001 4	100 37083 71001 1	12	12.41	6.25	8.13	12.25	24	108	1340.28
0 37083 71002 1	100 37083 71002 8	20	38.51	8.00	14.00	10.50	48	42	1617.42
0 37083 03191 1	100 37083 03191 8	12	15.07	6.25	8.13	11.63	18	108	1627.56
0 37083 07321 8	100 37083 07321 5	12	13.09	6.25	8.13	12.25	24	108	1413.72
0 37083 03171 3	100 37083 03171 0	12	15.00	6.25	8.13	11.63	24	108	1620
0 37083 03181 2	100 37083 03181 9	12	15.42	6.25	8.13	11.63	24	108	1665.36
0 37083 03241 3	100 37083 03241 0	12	9.64	6.25	8.13	11.63	24	108	1041.12
0 37083 03211 6	100 37083 03211 3	12	10.18	6.25	8.13	11.63	12	108	1099.44
0 37083 03251 2	100 37083 03251 9	12	15.00	6.25	8.13	11.63	24	108	1620
0 37083 02892 8	100 37083 02892 5	12	37.21	10.75	8.13	16.75	24	44	1637.24
0 37083 02601 6	100 37083 02601 3	12	9.99	6.25	8.13	11.63	24	108	1078.92
0 037083 87001 5	1 0037083 87001 2	12	9.72	6.25	8.13	12.25	24	108	1049.76
0 37083 07401 7	100 37083 07401 4	12	13.87	6.25	8.13	11.63	24	108	1497.96
0 37083 08401 6	100 37083 08401 3	12	13.87	6.25	8.13	11.63	24	108	1497.96
0 37083 05355 5	100 37083 05355 2	6	21.23	10.38	15.38	5.25	24	90	1910.7
0 37083 05356 2	100 37083 05356 9	4	55.45	6.75	13.25	7.56	24	30	1663.5
0 37083 05365 4	100 37083 05365 1	6	16.43	10.38	15.38	5.25	24	90	1478.7
0 37083 05366 1	100 37083 05366 8	4	42.65	6.75	13.25	7.56	24	30	1279.5
0 37083 05375 3	100 37083 05375 0	6	18.44	10.38	15.38	5.25	24	90	1659.6
0 37083 05376 0	100 37083 05376 7	4	47.99	6.75	13.25	7.56	24	30	1439.7
0 37083 05385 2	100 37083 05385 9	6	19.64	10.38	15.38	5.25	24	90	1767.6
0 37083 05386 9	100 37083 05386 6	4	51.21	6.75	13.25	7.56	24	30	1536.3
0 37083 08521 1	100 37083 08521 8	12	14	12.00	9.30	8.50	18	75	1050
0 37083 08522 8	100 37083 08522 5	12	24	11.69	9.38	11.63	18	48	1152
0 37083 08531 0	100 37083 08531 7	12	14	12.00	9.30	8.50	18	75	1050
0 37083 08532 7	100 37083 08532 4	12	24	11.69	9.38	11.63	18	48	1152
0 37083 08541 9	100 37083 08541 6	12	14	12.00	9.30	8.50	18	75	1050
0 37083 08542 6	100 37083 08542 3	12	24	11.69	9.38	11.63	18	48	1152
0 37083 08551 8	100 37083 08551 5	12	14	12.00	9.30	8.50	18	75	1050
0 37083 17862 3	100 37083 17862 0	2	2.8	14.30	15.00	2.19	-	120	336

Titebond®

THE PRO'S ADVANTAGE



Visit Titebond.com for the most up-to-date product information.



Franklin International

Columbus, Ohio 43207 614.443.0241 Technical Service 1.800.347.4583 © 2025 01079_8374TF FF937